OpenClaw3.28故障修复手册

背景

由于OpenClaw 3.28存在不兼容更新，自动更新后会导致飞书对话无法响应。飞书插件需要更新到最新3.29版本。

操作步骤

登录致远一号云平台


1. 进入致远一号云平台aic.sjtu.edu.cn，点击右上角登录，然后使用jAccount登录




2. 点击右上角”控制台“→”默认项目“，进入个人控制台



3. 点击"弹性云服务器ECS"

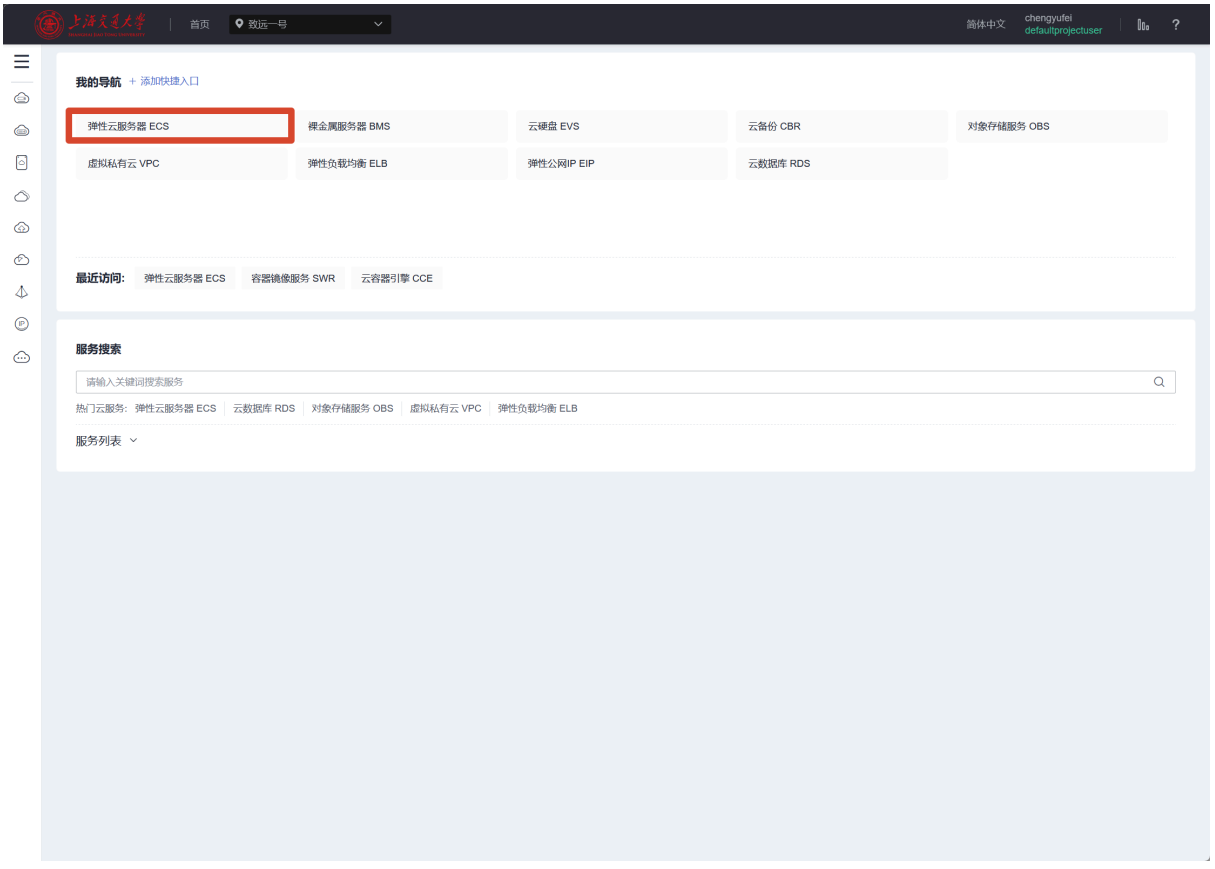


4. 记住云服务器的弹性公网IP地址，或点击旁边的复制按钮

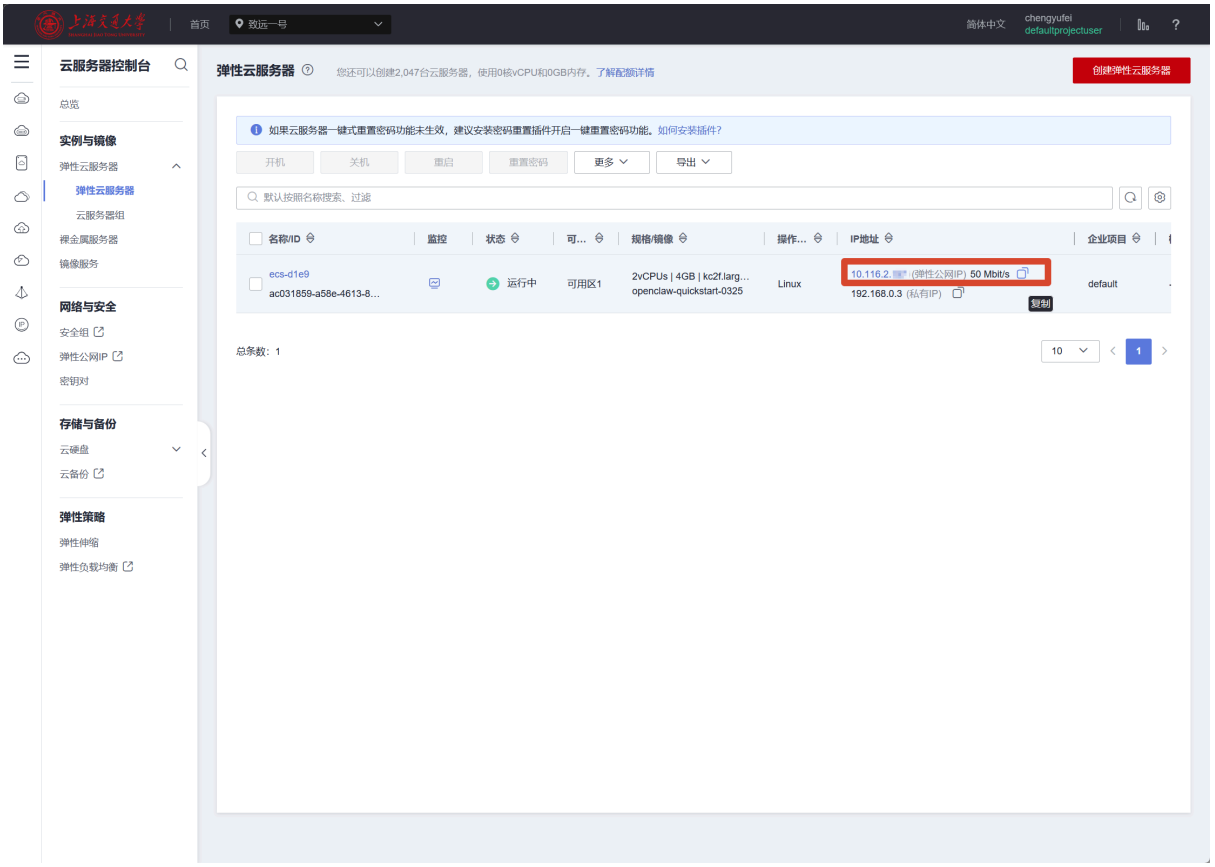


SSH登录云服务器


5. 【Windows】打开”开始“菜单，搜索PowerShell，点击打开；【MacOS】打开终端应用

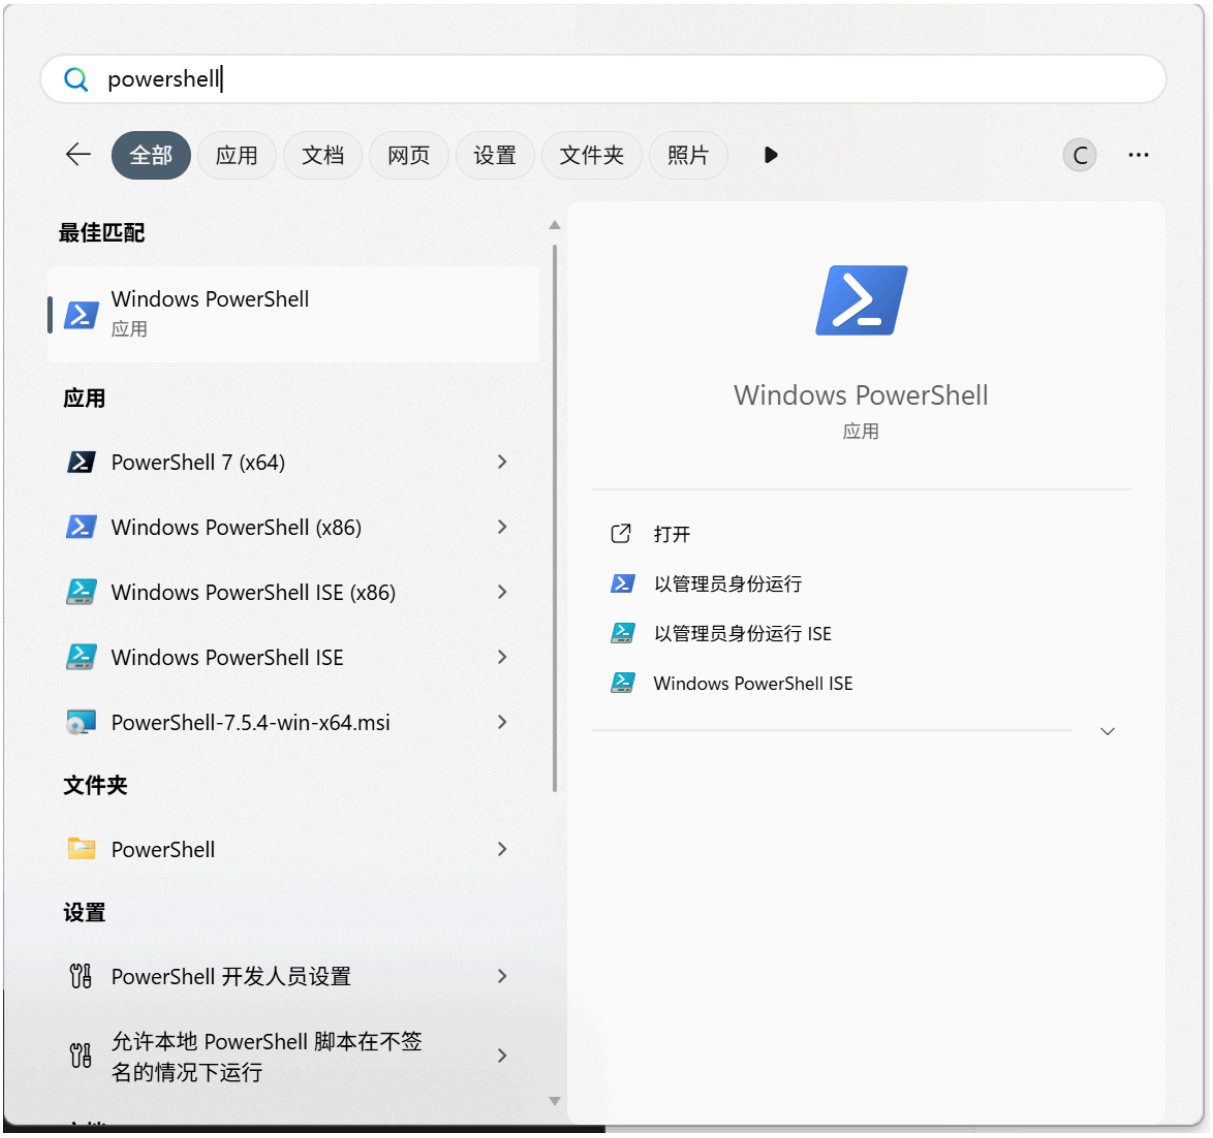

6. 输入命令 `ssh root@<云服务器弹性公网IP>`，<云服务器弹性公网IP>用刚刚在控制台复制的IP，比如 `ssh root@10.147.xx.xx`，回车，输入 `yes`

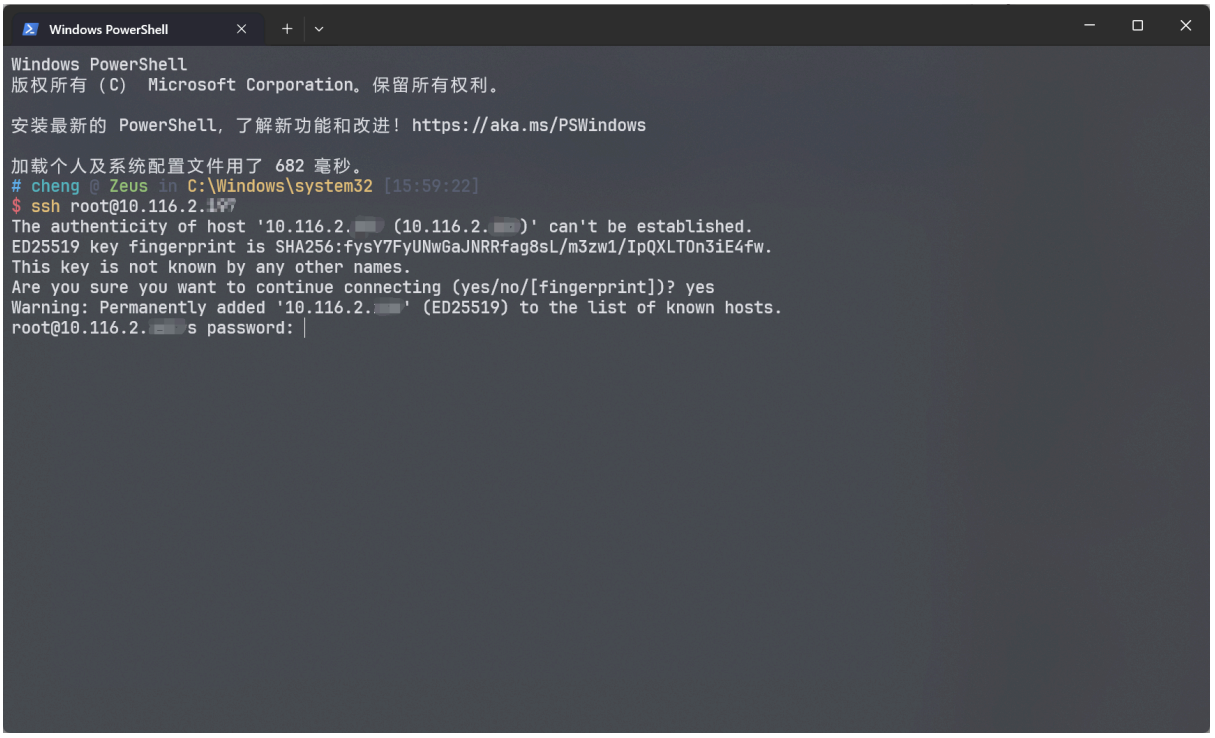

7. 输入云服务器密码，**密码是隐藏的**，输入后直接回车，进入云服务器后台

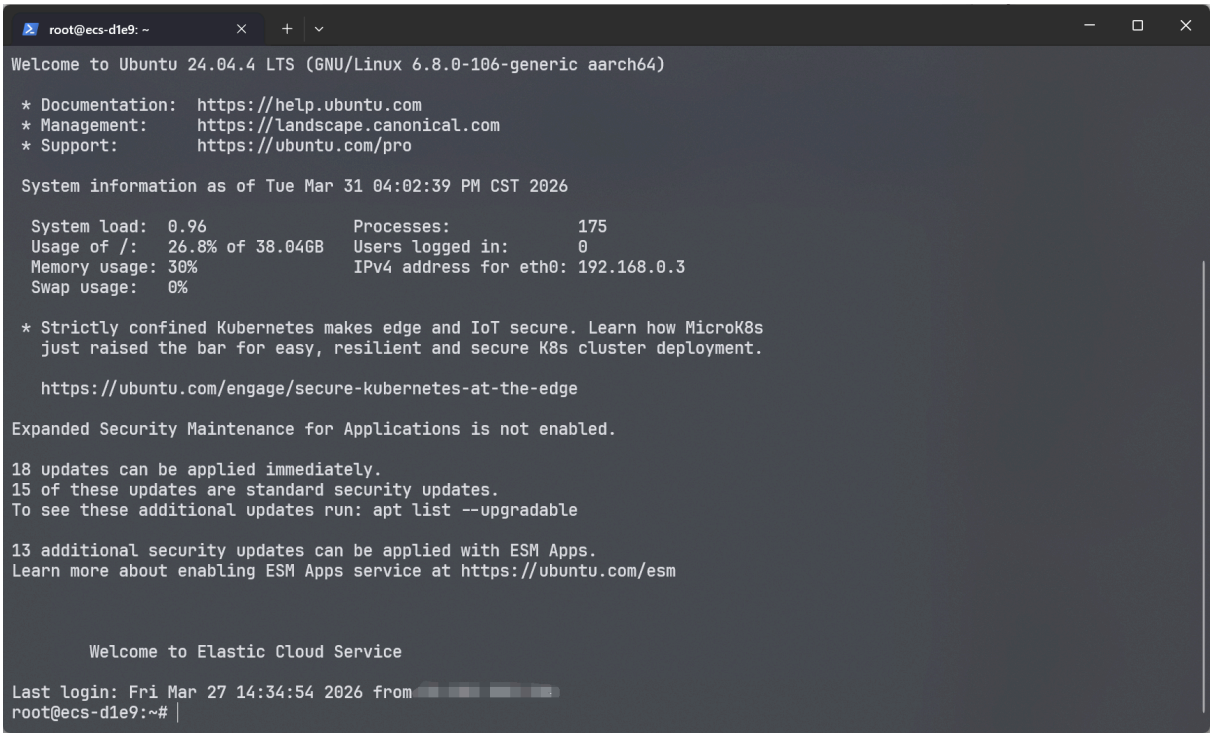

升级飞书插件

8. 输入命令`npx -y @larksuite/openclaw-lark@2026.3.30 install --tools-version 1.0.33`，升级飞书插件

```
root@ecs-cyf-claw:~# npx -y @larksuite/openclaw-lark@2026.3.30 install --tools-version 1.0.33
OpenClaw 2026.3.28 is compatible with openclaw-lark 2026.3.29
Packing @larksuite/openclaw-lark@2026.3.29 locally...
Installing plugin from local package...
15:17:54+08:00 [plugins] plugins.allow is empty; discovered non-bundled plugins may auto-load: openclaw-lark (/root/.openclaw/extensions/.openclaw-install-stage-WhZCua/index.js). Set plugins.allow to explicit trusted ids.
15:17:55+08:00 [plugins] openclaw-lark failed to load from /root/.openclaw/extensions/.openclaw-install-stage-WhZCua/index.js: Error: Cannot find module '@larksuiteoapi/node-sdk'
Require stack:
- /root/.openclaw/extensions/.openclaw-install-stage-WhZCua/src/core/lark-client.js

🦞 OpenClaw 2026.3.28 (f9b1079) — Automation with claws: minimal fuss, maximal pinch.

Extracting /tmp/openclaw-lark-jBjFst/larksuite-openclaw-lark-2026.3.29.tgz…
Plugin manifest id "openclaw-lark" differs from npm package name "@larksuite/openclaw-lark"; using manifest id as the config key.
WARNING: Plugin "openclaw-lark" contains dangerous code patterns: Environment variable access combined with network send — possible credential harvesting (/tmp/openclaw-plugin-q9tIr1/extract/package/src/tools/mcp/shared.js:105); Shell command execution detected (child_process) (/tmp/openclaw-plugin-q9tIr1/extract/package/src/core/token-store.js:60); Shell command execution detected (child_process) (/tmp/openclaw-plugin-q9tIr1/extract/package/bin/openclaw-lark.js:24)
Installing to /root/.openclaw/extensions/openclaw-lark…
Installing plugin dependencies…
Config warnings:
- plugins.entries.openclaw-lark: plugin openclaw-lark: duplicate plugin id detected; global plugin will be overridden by global plugin (/root/.openclaw/extensions/openclaw-lark/index.js)
Config overwrite: /root/.openclaw/openclaw.json (sha256 39a5ed886802e9c63eddd764a5fcb2f8d134f010a7b9bd99aff659e9a3de9cf3 -> 0b1ecd12f8160b563fd1fb1b771dad56ea144e0a208517b35da3c18a095e968f, backup=/root/.openclaw/openclaw.json.bak)
Installed plugin: openclaw-lark
Restart the gateway to load plugins.
```

8.5 升级中途显示 **是否继续使用该机器人**，输入`yes`，点击回车

```
? Found Feishu bot with App ID cli_a94e145f2efb5bc9. Use it for this setup (当前已配置飞书机器人[App ID: cli_a94e145f2efb5bc9]，是否继续使用该机器人)? Yes
✓ Using existing configuration (✓ 使用现有配置)
```

9. 显示`OpenClaw is all set. (OpenClaw 已就绪)`说明插件升级已经完成

```
🦞 OpenClaw 2026.3.28 (f9b1079) — I don't sleep, I just enter low-power mode and dream of clean diffs.


◇  Config warnings
   - plugins.entries.openclaw-lark: plugin openclaw-lark: duplicate plugin id detected;
     global plugin will be overridden by global plugin
     (/root/.openclaw/extensions/openclaw-lark/index.js)

Config warnings:\n- plugins.entries.openclaw-lark: plugin openclaw-lark: duplicate plugin id detected; global plugin will be overridden by global plugin (/root/.openclaw/extensions/openclaw-lark/index.js)
Restarted systemd service: openclaw-gateway.service
OpenClaw is all set. (OpenClaw 已就绪)
```


10. 进入飞书App，和龙虾对话，有可能会遇到配对请求



11. 将龙虾发送的命令`openclaw pairing approve feishu <Pairing code>`复制到PowerShell中，点击回车运行

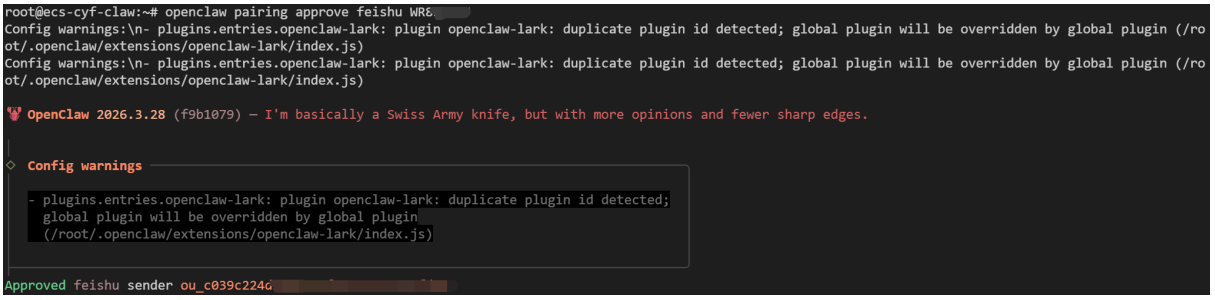

12. 龙虾复活了！

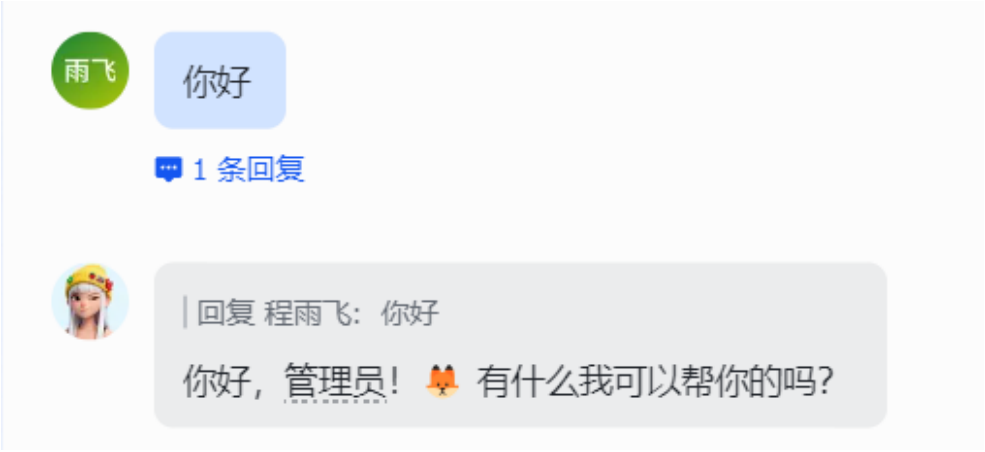

参考

OpenClaw 飞书官方插件使用指南

https://bytedance.larkoffice.com/docx/MFK7dDFLFoVlOGxWCv5cTXKmnMh